

SABRE™ RANGER

Ruggedized BGAN for Remote SCADA Applications



The SABRE™ Ranger is a class 3 BGAN terminal with a ruggedized mechanical enclosure build for long term outdoor all weather installation. It is designed for SCADA applications in remote unmanned location. The firmware is specially designed such that it can provide reliable and stable BGAN connectivity continuously for long period without user intervention. At the same time, the PDP context of the SABRE™ Ranger can be activated or deactivated remotely via SMS. The SABRE™ Ranger comes in two variants: one with heater for operation from -40°C to +75°C and one without for operation from -20°C to +75°C.

FEATURES

Standard BGAN features

- Simultaneous voice & data communications
- Data rate of up to 384 kbps
- Built-in Ethernet and Analog Phone interfaces
- Supports voice, email, messaging, VPN, FTP, VoIP, FoIP and video media streaming

SCADA features

- Enhanced firmware for reliable continuous long term BGAN network connection
- PDP activation/deactivation via SMS
- Ruggedized (IP65) mechanical enclosure for prolonged outdoor harsh weather installation.
- NEMA Type 4X Corrosion Resistance
- Enhanced Vibration and Shock Resistance

www.wideye.com.sg



BGAN for SCADA

The SABRE™ Ranger brings BGAN technology to the field of remote unmanned SCADA applications. It comes with an enhanced firmware that provide reliable continuous 24/7 operation and connectivity with the BGAN network.

Remote SMS Control

The PDP context of the terminal can be activated/deactivated via SMS which allows for remote activation/deactivation which provides cost saving.

Controllable via AT commands


The SABRE™ Ranger can be controlled via AT commands. When used with an embedded computing device with preprogrammed AT commands software, it can be programmed to perform various communication function with the BGAN network.

Autonomous M2M operation with Wideye™ IOTA™

This terminal can be seamlessly integrated with the Wideye™ IOTA™, which is a M2M application enabler. The IOTA™ is an embedded computing device with an ARM9 processor. Together, they form a platform whereby SCADA applications can be developed and used.

All Weather

With IP65 and NEMA Type 4X compliance certifications, the terminal is fit for long term outdoor installations in all weather conditions.

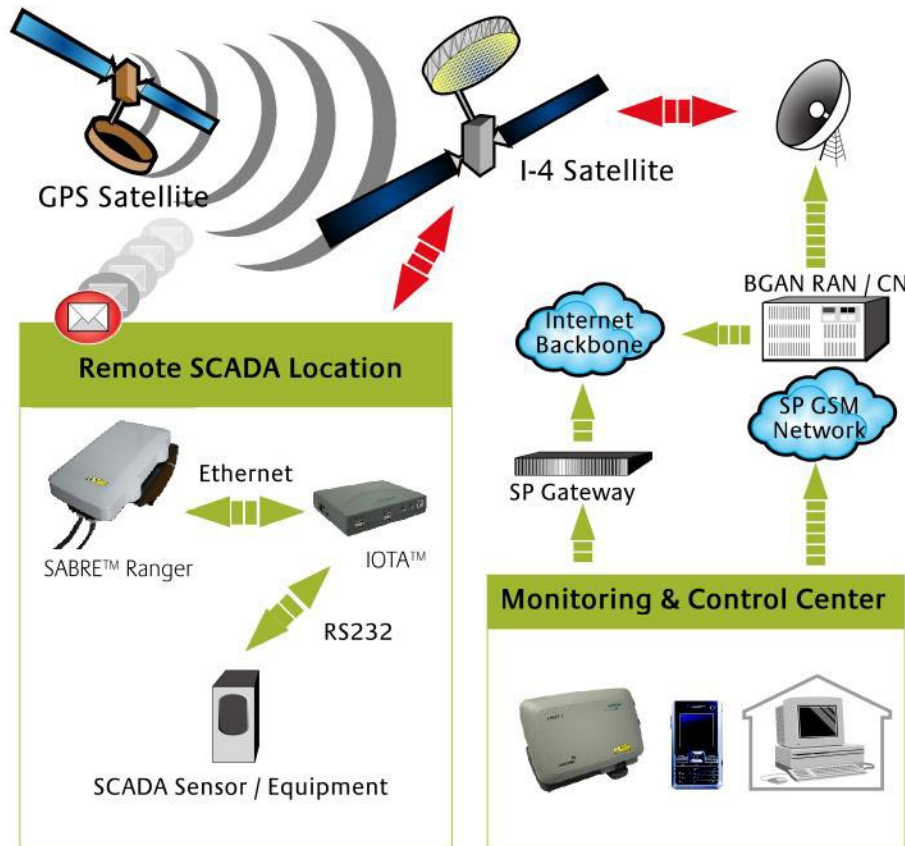

Technical Specifications

Frequency Band

Receive: 1525MHz - 1559MHz
Transmit: 1626.5MHz - 1660.5MHz

Antenna

Type: Built-in patch antenna

Bearer Data Rate

Receive: 384 kbps (Max)
Transmit: 240 kbps (Max)

GPS Air Interface

Integrated GPS receiver and antenna

Streaming IP

32 kbps, 64 kbps

Ethernet / LAN

1 x RJ45 Ethernet Port

Phone

1 x RJ11 Analog Phone Port

Application Support

VPN Client, VoIP, FoIP, MPEG Streaming, Email, Messaging, Conferencing, Web Browsing.

Operating System Support

Microsoft Windows,
WinCE,
Linux,
Mac OS

Environmental

Operating Temp: Non Heater: -20°C to +75°C
-4°F to 167°F
Heater: -40°C to +75°C
-40°F to 167°F

Operating

Humidity: 95%
(non-condensing at 40°C or +104°F)

Storage Temp:

-40°C to +80°C

Storage Humidity:

5% to 95% (RH)

Water & Dust:

IP65

Electrical

DC Input: 15 Vdc (power adapter)

Power Consumption

Standby: 6 W

Operating: 22 W

Heater: additional 20 W (max)

Weight

1.5 Kg / 3.3 lbs

Dimensions

305 x 186 x 49 mm

12 x 7.32 x 1.93 in

Certification of Compliance

CE

FCC

IC (Industry Canada)

CSA (Safety mark - cCSAus)

IP65

NEMA Type 4X

RoHS



Addvalue Communications Pte Ltd. 190 Changi Road, #02-02 MDIS Building, Singapore 419974.
Tel: +65 6342 5425, Fax: +65 6342 5426, Website: www.addvaluetech.com

© 2009 Addvalue Communications Pte Ltd. All rights reserved. Addvalue Communications may have pending patent applications, trademarks or registered trademarks, copyrights, or other intellectual property rights covering subject matter in this document. The furnishing of this document does not give you any license to these intellectual properties.

This material may contain unintended errors or omissions and is subject to change without notice. It is provided as is and without any express or implied warranties, including merchantability, fitness for a particular purpose and non-infringement. Addvalue shall not be liable for any special, indirect, incidental or consequential damages as a result of its use.

Addvalue, the Addvalue Enabled logo, Wideye, the Wideye logo and Sabre are either trademarks or registered trademarks of Addvalue Communications Pte Ltd in Singapore and/or other countries.

Inmarsat, the Inmarsat logo registered trademarks of Inmarsat Global Limited in the United Kingdom and/or other countries, and are used by Addvalue Communications Pte Ltd under license.

Microsoft and Windows are registered trademarks of Microsoft Corporation in the United States and/or other countries. Apple, Mac, Macintosh and Mac OS are trademarks of Apple Computer, Inc, registered in the United States and other countries. Bluetooth is a trademark of Bluetooth SIG, Inc in the United States and/or other countries. Other marks or trademarks are the properties of their respective owners.

Marlec Pty Ltd

ABN: 23 065 295 605

Unit 16/218 Wisemans Ferry Rd. SOMERSBY NSW 2250

Ph: 1800 045 801 Fax: 02 4340 1243

Email: sales@marlec.com.au

www.marlec.com.au

DOC#: WE071108060902